




Thermal Ceramics

## Tri-Mor Range of Non-Wetting Castables for Aluminium Industry

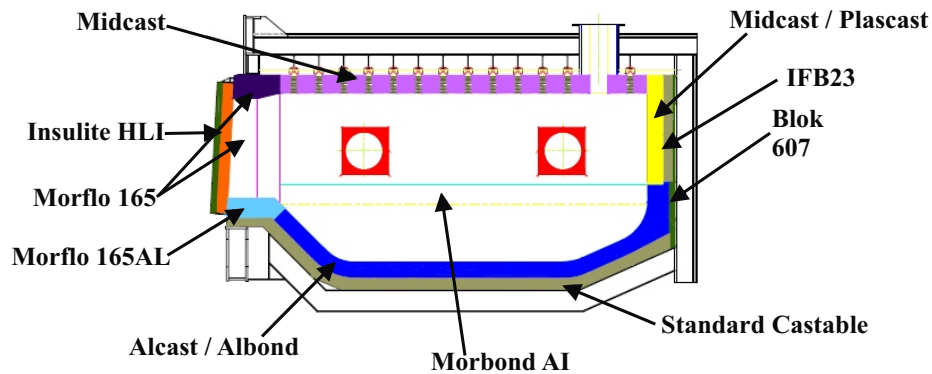

### Laminate Repair to Lower Sidewall with Morbond AL

- Two component chemically bonded castable
- Fast setting
- Exothermic reaction on setting reduces need for lengthy dry out

### Chemically bonded castable for Morbond AL laminate repairs

- Morbond AL bonds to existing refractory lining
- Morbond AL is resistant to corundum growth
- Morbond AL offers a fast, cost effective furnace repair



### Tri-Mor Alcoat – Refractory Coating



No Coating



Coated with Alcoat

Die casting Holding Furnace after 6 Months operation

- Supplied ready to use
- Completely non-wetted by aluminium
- Suitable for launders, furnace linings, tools etc