










CARBORUNDUM UNIVERSAL LIMITED

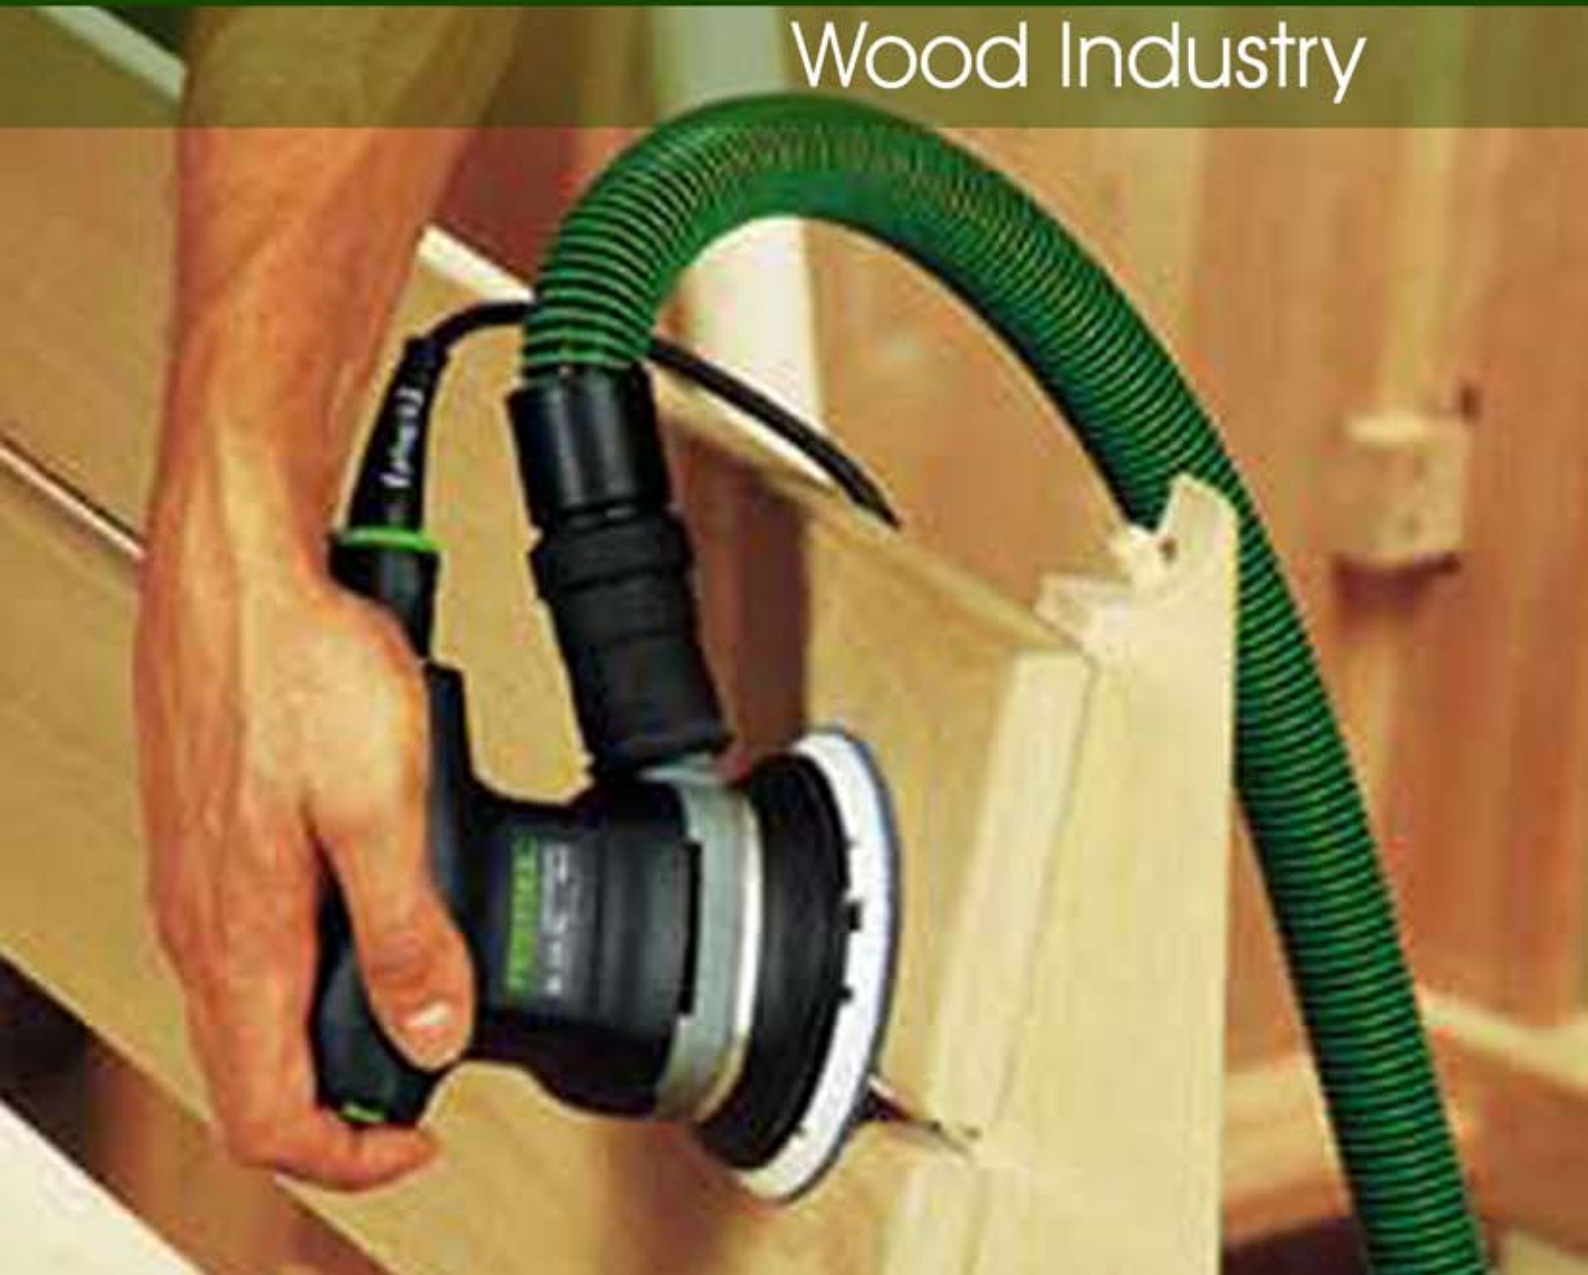

Abrasives for Wood Industry



Wood Industries







	Application	Product Code	Grain	Bond	Backin	Coating	Grit Rang	Brand	Forms	Features
	Finishing wood using rotary sander	FR 541	Alo	R/R	Fibre 0.6 mm	●	36 - 120	Gun	Disc	Economic product - faster output
	Finishing by using orbital sander	FP 544	Alo	R/R	'F' wt paper	◐	24 - 60	Supreme	Disc (velcro & psa), strips	Heavier backing for aggressive cut. Holes are provided for dust extraction - Minimum clogging increased life
		EP 544	Alo	R/R	'E' wt paper	◐	80 - 150	Supreme	Disc (velcro & psa), strips	Holes are provided for dust extraction - Minimum clogging increased life
	Hand sanding / finishing of wooden articles - furnitures, handicraft etc.	CR 112	Flint	G/G	'C' wt paper	●	24 - 180	Concord	Sheets	Soft bond, friable grain results in gentle abrasive action - To be used dry.
	Hand Sanding of hard & resinous wooden articles	CR 142	Alo	G/G	'C' wt paper	○	36 - 320	Concord	Sheets	Tough grain makes product aggressive particularly on hard wood - to be used dry.
	Hand Sanding of plastic, highly resinous wood	CR 171	SiC	G/G	'C' wt paper	●	220	Jawan	Sheets	Special third coat retards clogging - To be used dry.
	Finishing of protective coating (polyester, coating)	DV 371	SiC	R/R	'D' wt paper	●	80 - 220	Jawan	Sheets	Hard grain for finishing hard protective coating
		CV 371	SiC	R/R	'C' wt paper	●	320 - 1200	Jawan	Sheets	Hard grain for finishing hard protective coating

○ - Open

◐ - Semi Open

● - Closed

Wood Industries

	Application	Product Code	Grain	Bond	Backin	Coating	Grit Rang	Brand	Forms	Features
 	Sanding of wooden articles	XS 542	AlO	R/R	'X' wt Cotton	●	40 -120	Sand Master	Rolls	Universal product for hand sanding of wood, removal of old paints etc.
	Finishing of plywood / boards using stroke sanders	JG 242	AlO	R/G	'J' wt Cotton	●	60 - 320	Ajax	Rolls, Belts	Specialy treated cloth for minimum stretch. Best suited for slow belt speeds
		JG 542	AlO	R/R	'J' wt Cotton	●	36 - 320	Supercut	Rolls, Belts	Special bond for more aggressive cut
		XG 241	AlO	R/G	'X' wt Cotton	●	36 - 400	Jawan	Rolls, Belts	Specialy treated cloth for minimum stretch. Best suited for slow belt speeds
   	Finishing of wooden article using portable tools	XM 544	AlO	R/R	'X' wt Cotton	●	24 -120		Belts	Flexible cloth for portable tools.
	Finishing of plywood / protective coating on wood using machines like wide belt sander	FP 544	AlO	R/R	'F' wt paper	●	24 - 60	Supreme	Belts, Rolls, Strips	Heavy backing with special coating ensures aggressive cut. Minimum clogging for heavy stock removal
		EP 544	AlO	R/R	'E' wt paper	●	80 - 150	Supreme	Belts, Rolls, Strips	Lighter backing with special coating and bump free joint result in excellent finish
	Calibrating / finishing of particle board, MDF, chip board using wide belt sander	YS 571	SiC	R/R	'Y' wt Poly-Cotton	●	24 -150	Supreme	Wide belts	Special treated backing for stretch free operation, very good dimensional stability
Finishing of plywood/ protective coating on wood using machines like wide belt sander	XG 542 W	AlO	R/R	'Y' wt Cotton	●	24 - 400	CUMI	Wide belts	Universal product used on wood	

○ - Open

◐ - Semi Open

● - Closed